

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 024 001 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.08.2000 Bulletin 2000/31

(51) Int. Cl.⁷: B41J 2/14

(21) Application number: 00101419.0

(22) Date of filing: 25.01.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 29.01.1999 JP 2145099
19.11.1999 JP 32924199

(71) Applicant:
SEIKO EPSON CORPORATION
Shinjuku-ku, Tokyo (JP)

(72) Inventors:
• Takahashi, Tomoaki,
c/o Seiko Epson Corp.
Suwa-shi, Nagano (JP)
• Watanabe, Minoru,
c/o Seiko Epson Corp.
Suwa-shi, Nagano (JP)
• Furuhashi, Atsushi,
c/o Seiko Epson Corp.
Suwa-shi, Nagano (JP)


(74) Representative:
Buzzi, Franco et al
c/o Buzzi, Notaro & Antonielli d'Oulx Srl,
Corso Fiume, 6
10133 Torino (IT)

(54) Ink jet recording head and method of producing a plate member for an ink jet recording head

(57) A plate member (6) constituting a channel unit (1) of an ink jet recording head has a metal plate (15) which is produced by rolling an etchable material, and a polymer film (16) which is laminated onto one face of the metal plate (15). The long side is perpendicular to

the rolling direction of the metal plate (15). Warpage which easily occurs in the longitudinal direction is suppressed by the rigidity which is large in a direction perpendicular to the rolling direction.

Fig. 5

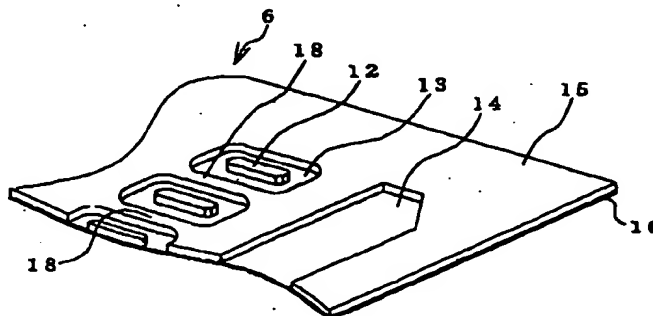

EP 1 024 001 A2

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to an ink jet recording head in which a piezoelectric vibrator of a longitudinal vibration mode is used as a driving source, and more particularly to a structure of an elastic plate which receives a pressure due to a displacement of a piezoelectric vibrator, and also to a method of producing such a plate.

[0002] In order to improve the recording density, the pitch of nozzle opening rows tends to be reduced. To comply with this tendency, a single crystal silicon wafer is isotropically etched, and a nozzle plate and an elastic plate which are produced another method are fixed to the etched wafer, thereby configuring a channel unit. A displacement of a piezoelectric vibrator is transmitted to the channel unit so as to produce a pressure in a pressure generating chamber, and an ink droplet is ejected from a nozzle opening by the pressure.

[0003] When pressure generating chambers are arranged in high density, each of the pressure generating chambers has a very small width. In order to cause the whole of the longitudinal direction of a pressure generating chamber to be efficiently deformed, therefore, a configuration is employed in which a convex portion, or a so-called island portion that elongates in the longitudinal direction of the pressure generating chamber is formed on the surface of the elastic plate, and the displacement of the piezoelectric vibrator is transmitted via the island portion to a wide region of the elastic plate sealing the pressure generating chamber.

[0004] It has been proposed that a polymer film or a metal thin plate is used as such an elastic plate, a metal plate member, for example, a stainless steel plate which has a relatively large thickness so as to ensure the rigidity of the elastic plate is laminated onto the surface of the elastic plate, and the stainless steel plate is etched, thereby forming an island portion which transmits a displacement of a piezoelectric vibrator to the whole of a pressure generating chamber, and a diaphragm portion which is elastically deformed by the displacement of the island portion to change the capacity of the pressure generating chamber (WO93/25390).

[0005] However, this proposed configuration has the following problem. The coefficient of thermal expansion of the plate member serving as the elastic plate, particularly a polymer film is largely different from that of the metal plate for ensuring the rigidity. Furthermore, heat applied during the production process causes polymer materials to shrink. During the process of producing the channel unit, therefore, the plate member is flexurally deformed and a positional error occurs between the plate member and a channel forming substrate.

SUMMARY OF THE INVENTION

[0006] The invention has been conducted in view of the problem. It is an object of the invention to provide an ink jet recording head in which deformation of a plate member during a production process can be suppressed as far as possible, whereby the production process can be simplified.

[0007] It is a second object of the invention to provide a method of producing such a plate member.

[0008] A plate member according to the present invention is configured by a substantially rectangular base member of a laminated structure including an elastic plate and a rolled metal plate that are laminated with each other. The elastic plate is elastically deformable by an external pressure, and has an ink resistance. The rolled metal plate is produced by rolling an etchable metal material. A longitudinal direction of the base member is perpendicular to a rolling direction of the rolled metal plate.

[0009] Usually, the rigidity of a metal material is large in a direction perpendicular to the rolling direction. Therefore, warpage which is likely to occur in the longitudinal direction is suppressed by the rigidity that is enhanced by the directionality of rolling.

[0010] An ink jet recording head according to an embodiment includes a nozzle opening, a pressure generating chamber, a reservoir, and an ink supply port. At least the pressure generating chamber or the reservoir is sealed by a plate member which is partly elastically deformable. The plate member is configured by a substantially rectangular base member in which an elastic plate that can be elastically deformed by an external pressure, and that has an ink resistance, and a rolled metal plate that is produced by rolling an etchable metal material are laminated with each other. A longitudinal direction of the base member is perpendicular to a rolling direction of the rolled metal plate. Therefore, the rigidity in the direction perpendicular to the rolling direction is large, warpage which easily occurs in the longitudinal direction can be suppressed by the rigidity that is enhanced by the directionality of rolling, and the positioning accuracy in an assembly process can be ensured.

[0011] The present disclosure relates to the subject matter contained in Japanese patent application Nos. Hei. 11-21450 (filed on January 29, 1999), and Hei. 11-329241 (filed on November 19, 1999), which are expressly incorporated herein by reference in their entireties.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Fig. 1 is a section view showing an embodiment of the ink jet recording head of the invention, and taken in the longitudinal direction of a pressure gen-

erating chamber.

Fig. 2 is a view showing an embodiment of an elastic plate used in the recording head.

Fig. 3 is a view showing another embodiment of the elastic plate used in the recording head.

Fig. 4 is a section view showing another embodiment of the ink jet recording head of the invention, and taken in the longitudinal direction of a pressure generating chamber.

Fig. 5 is an enlarged view of an island portion of an elastic plate of another embodiment of the invention.

Fig. 6 is a view schematically showing an ink jet recording head which uses a flexural vibrator as a driving source, and to which the present invention is applicable.

Fig. 7 is an exploded perspective view showing the structure of the recording head shown in Fig. 6.

Fig. 8 is a section view showing the structure in the case where the invention is applied to the recording head shown in Fig. 6.

Figs. 9(a) and 9(b) are views respectively showing production methods in the case where an elastic region is formed by a metal plate.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] Hereinafter, the invention will be described in detail with reference to illustrated embodiments.

[0014] Fig. 1 shows an embodiment of the ink jet recording head of the invention. The ink jet recording head is configured by integrally fixing a channel unit 1 and a piezoelectric vibrator unit 2 via a head holder 3. The channel unit 1 is configured by laminating a nozzle plate 4, a channel forming substrate 5, and a plate member 6. Pressure generating chambers 8 are contracted and expanded by expansion and contraction of respective piezoelectric vibrators 7 of the piezoelectric vibrator unit 2, thereby ejecting ink droplets.

[0015] The nozzle plate 4 is formed with nozzle openings 9 which respectively communicate with the pressure generating chambers 8, and the channel forming substrate 5 is formed with the pressure generating chambers 8, ink supply ports 10, and reservoirs 11. In this embodiment, a common reservoir 11 is provided for each row of the pressure generating chambers 8, and ink supply ports 10 are provided to communicate the common reservoir 11 with the corresponding row of the pressure generating chambers 8.

[0016] As shown in Fig. 2, the plate member 6 is formed with island portions 12 for abutment against the respective tip ends of the piezoelectric vibrators 7, and elastically deformable diaphragm portions 13. In this embodiment, a diaphragm portion 13 is provided to surround each row of island portions 12, and the diaphragm portion 13 and the corresponding row of the island portions 12 are located to be opposed to the corresponding row of the pressure generating chambers 8

as shown in Fig. 1. A diaphragm portion 14 which is similar to the diaphragm portion 13 is formed in the region opposed to the corresponding reservoir 11.

[0017] As shown in Fig. 2, the plate member 6, which is one of features of the invention, is configured by using a base member that is formed by lamination of a polymer film 16 such as a polyphenylene sulfide (PPS) resin and a rolled metal plate 15 by bonding or thermal welding. The rolled metal plate has a thickness of about 10 to 30 μm and is obtained by rolling a high-rigidity and etchable material such as stainless steel in one direction. The polymer film can be elastically deformed by a displacement of the piezoelectric vibrators 7, and has a corrosion resistance to an ink.

[0018] The polymer film 16 may be laminated onto the metal plate 15 after the film is previously annealed at a temperature at which the film is not softened, for example, about 80 to 150°C. In this case, shrinkage is already completed as a result of the annealing process. Therefore, this is preferable because shrinkage does not occur in subsequent steps and warpage can be suppressed to a very low degree.

[0019] The base member is cut so that the long side 6a of each plate member 6 elongates in the direction perpendicular to the rolling direction (the direction of the arrow A in the figure) of the rolled metal plate 15. Positioning holes 17 in the form of through holes are opened in appropriate positions of the plate member. Thereafter, regions where the diaphragm portions 13 and 14 are to be formed are etched away, whereby the island portions 12 are formed from the rolled metal plate 15. Alternatively, prior to cutting the base member into a plurality of plate members 6, the regions where the diaphragm portions 13 and 14 are to be formed are etched away, so that the diaphragm portions 13 and 14 for a plate member 6 are arrayed in a direction perpendicular to the rolling direction, and the island portions 12 are formed from the rolled metal plate 15. Thereafter, the positioning holes 17 are opened in appropriate positions, and finally the base member is cut so that the short side 6b of each plate member 6 elongates in the rolling direction of the rolled metal plate 15.

[0020] The plate member 6 which has been formed as described above is positioned by using the positioning holes 17 on one face of the channel forming substrate 5 having the nozzle plate 4 laminated onto the other face thereof, so that the island portions 12 and the diaphragm portions 13 are located in specified positions with respect to the pressure generating chambers 8, and the plate member 6 is then laminated onto the substrate 5.

[0021] Since the plate member 6 is configured so that the long side 6a elongates in the direction perpendicular to the rolling direction of the rolled metal plate 15, the rigidity in the direction of the long side of the rolled metal plate 15 is larger by about 10% than that in the direction of the short side, and hence warpage is smaller in degree by about 30% than that in the

prior art. During the laminating process, therefore, the positioning of the plate member 6 with respect to the channel forming substrate 5, more specifically, positioning of the island portions 12 and the diaphragm portion 13 with respect to the pressure generating chambers 8 can be correctly performed. Furthermore, the plate member 6 can be bonded to the channel forming substrate 5 without forming an air gap therebetween.

[0022] Since the polymer film 16 is previously annealed, the film does not shrink even when the film is heated during the work of bonding the film to the rolled metal plate 15, and hence warpage in the plate member 6 can be suppressed to a small degree. Moreover, the elastic modulus is substantially maintained to be equal to that attained before the bonding. Therefore, the diaphragm portion 14 is sufficiently deformed by a pressure exerted by an ink which reversely flows from the ink supply port into the reservoir 11 during the ink droplet ejection, so that pressure variation is surely absorbed by a large compliance.

[0023] In the embodiment described above, the rows of the reservoirs and the island portions are arranged in the direction perpendicular to the rolling direction of the metal plate 15 constituting the plate member 6. Alternatively, as shown in Fig. 3, a large number of the island portions 12 may be arranged in each of a small number of rows, resulting in that the length of the arrangement of the island portions 12 is large. In this case, the metal plate 15 may be cut out so that the arrangement direction of the island portions 12, namely the long side 6a' is perpendicular to the rolling direction (the direction of the arrow A in the figure) of the metal plate 15, or the short side 6b' is parallel to the rolling direction. In this case also, the same effects as described above can be attained.

[0024] In the embodiment described above, the rolled metal plate 15 is laminated only onto the one face of the polymer film 16. As shown in Fig. 4, the rolled metal plate 15 may be laminated onto both the faces of the polymer film 16, etching is performed with using the polymer film 16 as the symmetry plane to form second island portions 12' which can respectively enter the pressure generating chambers 8, and the metal plate on the inner face and opposed to the reservoir 11 is etched away to ensure the diaphragm portion 14. In this case also, the same effects as described above can be attained.

[0025] In the embodiment described above, only the island portions 12 are formed in the diaphragm portions 13. As shown in Fig. 5, regions which are respectively opposed to walls separating the adjacent pressure generating chambers 8 may be formed as unetched regions so as to form bridge portions 18. In this case, the bridge portions 18 function as reinforcing members.

[0026] In the invention, the anisotropy of the rigidity of a rolled metal plate which is used as the base metal is suitably applied to the structure of an ink jet recording head. Consequently, the invention can be applied not

only to a recording head of the type in which a pressure generating chamber is contracted and expanded by a piezoelectric vibrator that expands and contracts in the axial direction, and also to components constituting a recording head in which a plate-like piezoelectric vibrator is used and ink droplets are ejected by flexural deformation. Also in the latter case, the same effects as described above can be attained.

[0027] Specifically, the invention may be applied also to a recording head in which, as shown in Fig. 6, nozzle opening rows that are divided into plural groups are formed in a single channel unit 20, and plural (in the embodiment, three) actuator units 21 for pressurizing an ink are attached to the channel unit.

[0028] Fig. 7 shows components constituting the recording head of Fig. 6, in an exploded manner. The channel unit 20 is configured by laminating: a nozzle plate 23 in which nozzle openings 22 are formed; a reservoir forming substrate 25 in which communication holes for forming reservoirs 24 are opened; and a plate member 27 which seals other faces of the reservoirs to form communication holes 26 between the reservoirs 24 and the actuator units 21, and which functions as an attachment member for the actuator units 21.

[0029] Each of the actuator units 21 is configured by sequentially laminating a sealing substrate 28, a pressure generating chamber forming substrate 29, and a diaphragm 30. Lower electrodes 32 are separately formed on the surface of the diaphragm 30 so as to respectively correspond to pressure generating chambers 31. A layer of a piezoelectric vibrator 33 made of an electrostriction material is formed in correspondence with the surfaces of the lower electrodes 32. An upper electrode 34 is formed on the surface of the piezoelectric vibrator 33 so as to receive a supply of a driving signal through a flexible cable 35.

[0030] As the plate member 27 of the thus configured recording head, the member described above may be used.

[0031] Fig. 8 shows an embodiment of the ink jet recording head in which the member described above is used. In the figure, 36 denotes a plate member. The plate member 36 is configured by a base member formed by laminating a polymer film 38 such as a polyphenylene sulfide (PPS) resin, onto a rolled metal plate 37 by thermal welding or bonding. The rolled metal plate 37 has a thickness of about 10 to 30 μm and is obtained by rolling a high-rigidity and etchable material such as stainless steel in one direction. The polymer film 38 can be elastically deformed by variation of the ink pressure in the reservoir 24 to exhibit a compliance, and has a corrosion resistance to an ink. The polymer film 38 may be laminated onto the metal plate 37 after the film 38 is previously annealed at a temperature at which the film 38 is not softened, for example, about 80 to 150°C. In this case, shrinkage is already completed as a result of the annealing process. Therefore, this is preferable because shrinkage does not occur in subse-

quent steps and warpage can be suppressed to a very low degree.

[0032] The plate member 36 is configured by cutting the base member so that the long side of the plate member 36 (i.e., the arrangement direction of the actuator units 21) elongates in the direction perpendicular to the rolling direction of the rolled metal plate 37, and by etching away regions of the metal plate 37 which are opposed to the reservoirs 24, to form compliance applying portions 39.

[0033] In the thus formed plate member 36, one face of the polymer film 38 in the compliance applying portions 39 is opposed to the reservoirs 24, and the other face of the polymer film 38 which is exposed through recesses 37a formed by removing away the metal plate 37 is opposed to the actuator units 21 via an air gap G formed by an adhesive agent layer 40. According to this configuration, even when an ink that is pressurized in the corresponding pressure generating chamber 31 by a displacement of the piezoelectric vibrator 33 reversely flows through a communication hole 26 to raise the pressure in the reservoir 24, the compliance applying portion 39 formed by the polymer film 38 is displaced to absorb the pressure variation in the reservoir 24.

[0034] Since the short side is parallel to the rolling direction of the metal plate 37 constituting the plate member 36, the rigidity can be maintained and warpage and the like can be suppressed as far as possible even when the length of the side in the arrangement direction of the plural actuator units 21 is large.

[0035] In the embodiments described above, stainless steel is used as the rolled metal plate. Another metal which can be rolled and etched and has high adhesive properties, such as copper, nickel, or iron may be used with attaining the same effects as described above.

[0036] In the embodiments described above, a polyphenylene sulfide (PPS) resin is used as the polymer film. Another polymer material may be used such as a polyimide (PI) resin, a polyether imide (PEI) resin, a polyamide-imide (PAI) resin, a polyparabanic acid (PPA) resin, a polysulfone (PSF) resin, a polyether sulfone (PES) resin, a polyether ketone (PEK) resin, a polyether ether ketone (PEEK) resin, a polyolefin (APO) resin, a polyethylene naphthalate (PEN) resin, an aramid resin, a polypropylene resin, a vinylidene chloride resin, or a polycarbonate resin.

[0037] In the embodiments described above, a layer which has an etching resistance and which is elastically deformable is formed by a polymer film. It is apparent that, even when any other material such as alumina or a metal which has an etching resistance and which can be deformed by variation of the ink pressure in a reservoir or a displacement of a piezoelectric vibrator is used, the same effects as described above can be attained.

[0038] When the elastically deformable region is

configured by a metal material, the configuration shown in Fig. 9(a) may be employed. In the configuration, a rolled metal plate 40, and a metal plate 41 constituting the elastically deformable region are laminated via an adhesive agent layer 42 having an etching resistance. Etching is performed on the surface 40a of the rolled metal plate 40 so that the adhesive agent layer 42 functions as an etching stopper, thereby enabling only the rolled metal plate 40 to be selectively etched.

[0039] Alternatively, as shown in Fig. 9(b), a rolled metal plate 43 which has undergone an etching process is laminated onto a metal plate 45 constituting the elastically deformable region, by a film 44 forming an adhesive agent.

Claims

1. An ink jet recording head comprising a nozzle opening, a pressure generating chamber, a reservoir, and an ink supply port, at least one of said pressure generating chamber and said reservoir being sealed by a plate member which is partly elastically deformable, wherein

said plate member is constructed by a substantially rectangular base member in which an elastic plate that can be elastically deformed by an external pressure, and that has an ink resistance, and a rolled metal plate that is produced by rolling an etchable metal material are laminated with each other, and a longitudinal direction of said base member is perpendicular to a rolling direction of said rolled metal plate.

2. An ink jet recording head according to claim 1, wherein said elastic plate includes a polymer film.
3. An ink jet recording head according to claim 1, wherein said elastic plate includes a polymer film which is annealed before said elastic plate is laminated with said rolled metal plate.
4. An ink jet recording head according to claim 1, wherein said elastic plate includes a metal plate that can be elastically deformed by an external pressure, and that has an ink resistance, and is laminated with said rolled metal plate via an adhesive agent layer.
5. An ink jet recording head comprising: a channel unit having a nozzle opening, a pressure generating chamber, a reservoir, an ink supply port, said channel unit being sealed by a plate member having an island portion which is opposed to said pressure generating chamber, and a diaphragm portion; and a piezoelectric vibrator which abuts against said island portion to eject an ink droplet, wherein

said plate member is constructed by a substantially rectangular base member in which an elastic plate that can be elastically deformed by a displacement of said piezoelectric vibrator, and that has an ink resistance, and a rolled metal plate that is produced by rolling an etchable metal material are laminated with each other, and a longitudinal direction of said base member is perpendicular to a rolling direction of said rolled metal plate.

6. An ink jet recording head according to claim 5, wherein said elastic plate includes a polymer film.
7. An ink jet recording head according to claim 5, wherein said elastic plate includes a polymer film which is annealed before said elastic plate is laminated with said rolled metal plate.
8. An ink jet recording head according to claim 5, wherein said elastic plate includes a metal plate that can be elastically deformed by an external pressure, and that has an ink resistance, and is laminated with said rolled metal plate via an adhesive agent layer.
9. An ink jet recording head according to claim 5, wherein said rolled metal plate is etched so as to form said island portion.
10. An ink jet recording head according to claim 5, wherein said diaphragm portion is formed by etching away said rolled metal plate in a region which is opposed to said reservoir.
11. An ink jet recording head according to claim 5, wherein a plurality of said island portions are arranged in a direction parallel to said longitudinal direction.
12. An ink jet recording head according to claim 5, wherein a plurality of said island portions are arranged in a direction perpendicular to said longitudinal direction.
13. An ink jet recording head comprising a channel unit and a plurality of actuator units, said channel unit being constructed by laminating a nozzle plate in which a nozzle opening is formed, a reservoir forming substrate in which a communication hole forming a reservoir is opened, and a plate member which seals another face of said reservoir to form an ink channel between said reservoir and said actuator units, and which functions as an attachment member for said actuator units, each of said actuator units being constructed by sequentially laminating a sealing substrate, a pressure generating chamber forming substrate, and a diaphragm

and being fixed to a surface of said plate member of said channel unit, wherein

said plate member is constructed by a substantially rectangular base member in which an elastic plate that can be elastically deformed by a pressure in said reservoir, and that has an ink resistance, and a rolled metal plate that is produced by rolling an etchable metal material are laminated with each other, and said actuator units are arranged in a direction which is perpendicular to a rolling direction of said rolled metal plate.

14. An ink jet recording head according to claim 9, wherein said elastic plate is placed on a face which is opposed to said reservoir, and said rolled metal plate is formed by etching away a region which is opposed to said reservoir.
15. An ink jet recording head according to claim 13, wherein said elastic plate includes a polymer film.
16. An ink jet recording head according to claim 13, wherein said elastic plate includes a polymer film which is annealed before said elastic plate is laminated with said rolled metal plate.
17. An ink jet recording head according to claim 13, wherein said elastic plate includes a metal plate that can be elastically deformed by an external pressure, and that has an ink resistance, and is laminated with said rolled metal plate via an adhesive agent layer.
18. An ink jet recording head according to claim 13, wherein said rolled metal plate is etched so as to form a compliance portion in said reservoir.
19. A method of producing an elastic plate for an ink jet recording head, comprising the steps of:
 - laminating and bonding a polymer film and a rolled metal plate to form a base member; and
 - etching said rolled metal plate in such a manner that a rolling direction of said rolled metal plate is parallel to a long side of an elastic plate, thereby forming a through hole serving as an elastically deformable region.
20. A method of producing an elastic plate for an ink jet recording head, comprising the steps of:

laminating and bonding a polymer film which has undergone an annealing process, and a rolled metal plate to form a base member; and etching said rolled metal plate in such a manner that a rolling direction of said rolled metal

plate is parallel to a long side of an elastic plate, thereby forming a through hole serving as an elastically deformable region.

21. A method of producing an elastic plate for an ink jet recording head, comprising the steps of:

laminating and bonding a metal plate which is elastically deformable, and a rolled metal plate via an adhesive agent layer having an etching resistance; and

etching said rolled metal plate in such a manner that a rolling direction of said rolled metal plate is parallel to a long side of an elastic plate, thereby forming a through hole serving as an elastically deformable region.

22. A method of producing an elastic plate for an ink jet recording head, wherein a through hole is formed in such a manner that a rolling direction of a rolled metal plate is parallel to a long side of an elastic plate, and said rolled metal plate is bonded to a metal plate which is elastically deformable, via an adhesive agent layer.

23. A plate member adapted to form a part of a channel unit of an ink jet recording head, said plate member having a rolled metal plate and an elastic plate laminated on said rolled metal plate, and being substantially in the form of a rectangle having a first side and a second side shorter than said first side, a rolling direction of said rolled metal extending substantially parallel to said second side.

24. A plate member according to claim 23, wherein at least one row of island portions are provided in said plate member, each of said island portions is surrounded by exposed part of said elastic plate.

25. A plate member according to claim 24, wherein said row extends in a direction parallel to said second side.

26. A plate member according to claim 24, wherein said row extends in a direction perpendicular to said second side.

27. A plate member according to claim 23, wherein at least one diaphragm portion is provided in said plate member by exposed part of said elastic plate.

28. A plate member according to claim 27, wherein said diaphragm portion elongates in a direction parallel to said second side.

29. A plate member according to claim 27, wherein said diaphragm portion elongates in a direction perpendicular to said second side.

30. A plate member according to claim 23, wherein at least one row of compliance applying portions are provided in said plate member by exposed part of said elastic plate, and said row extends in a direction parallel to said first side.

Fig. 1

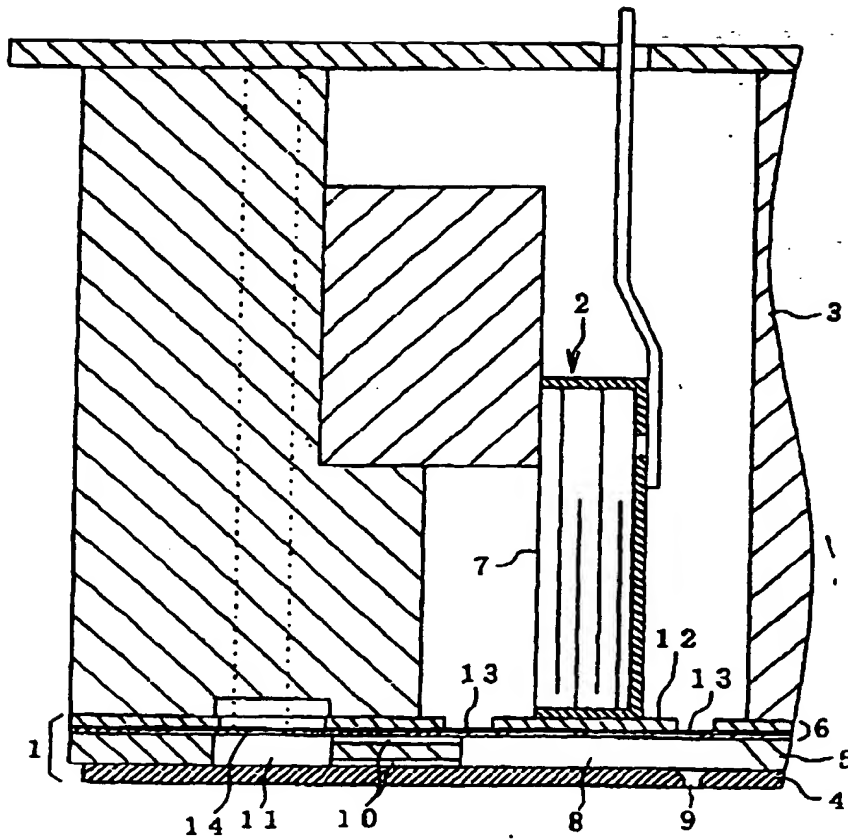


Fig. 2

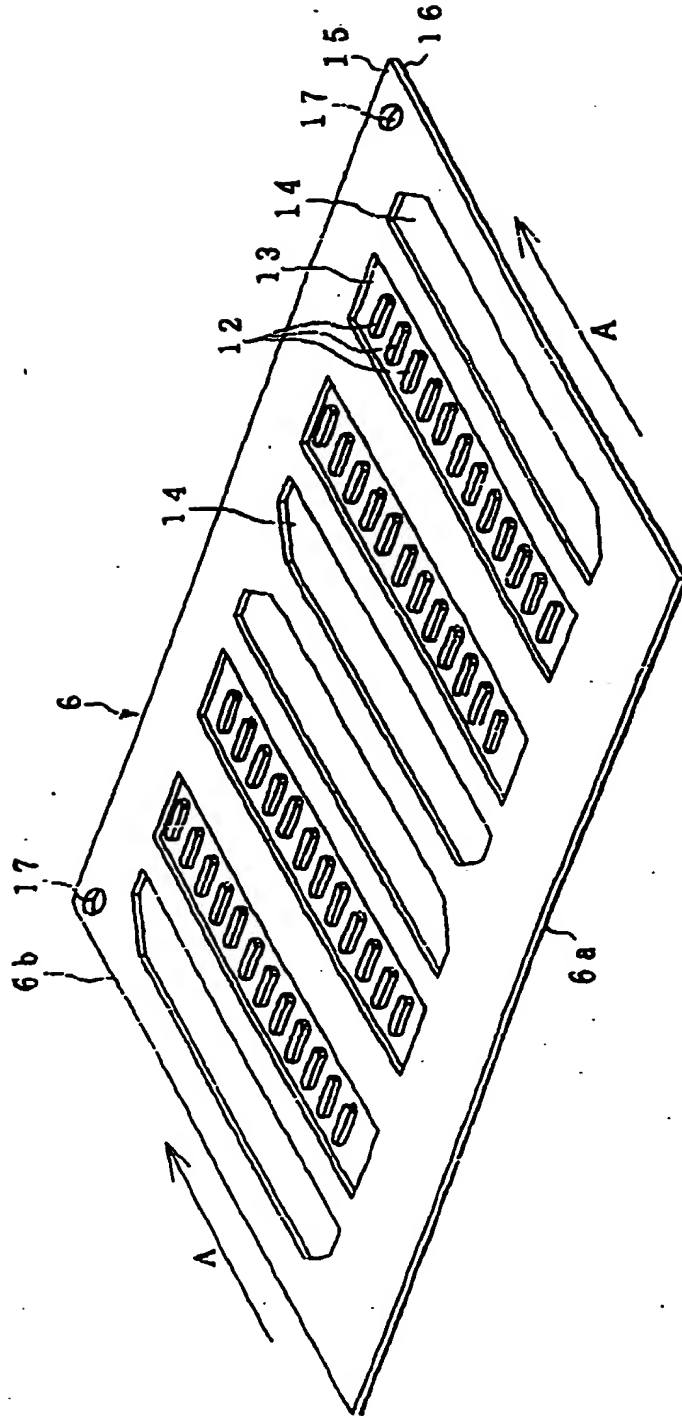


Fig. 3

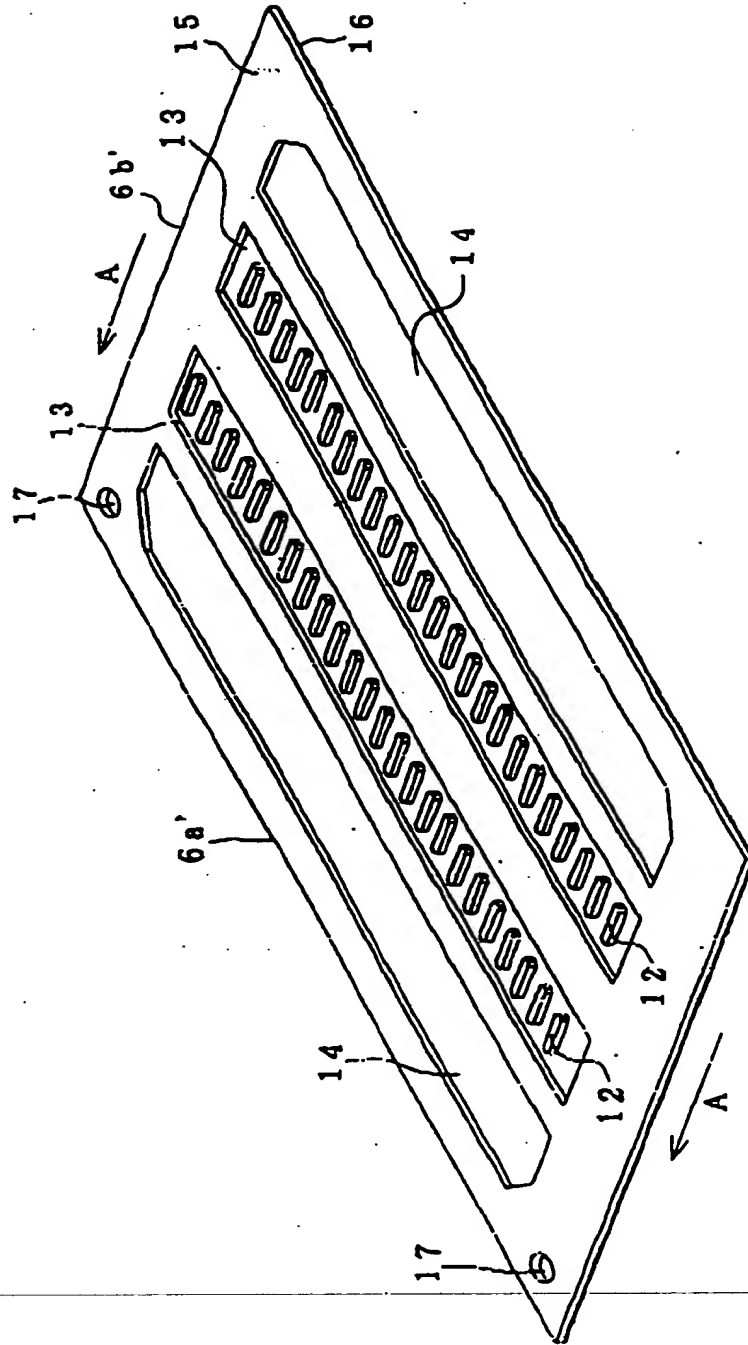


Fig. 4

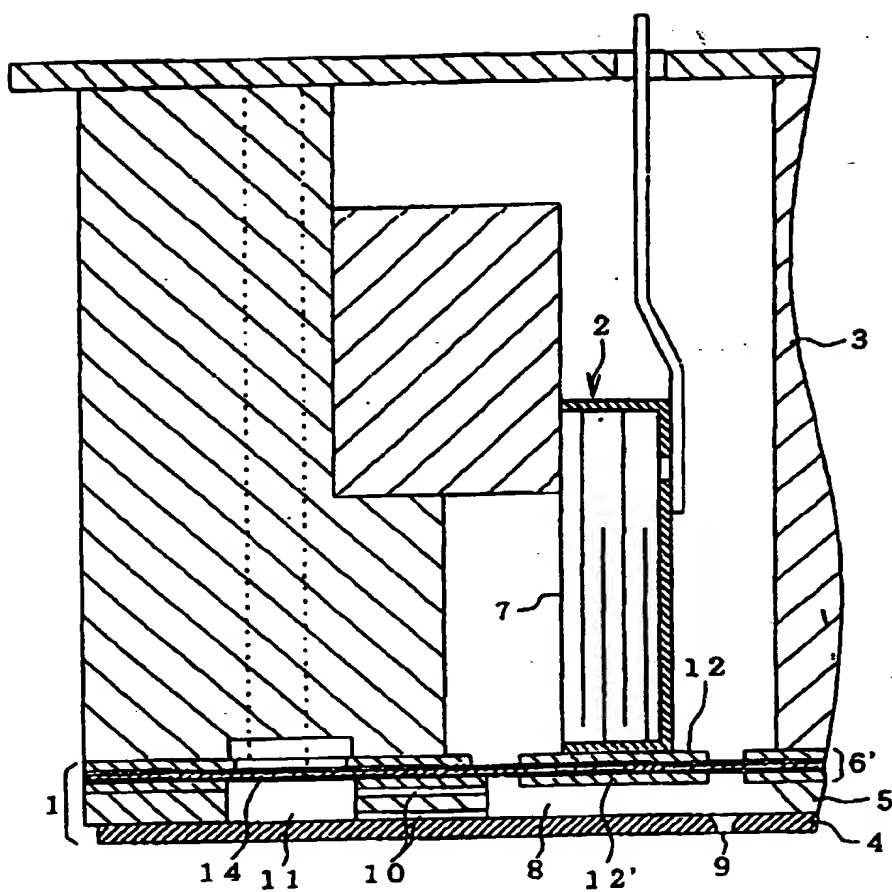


Fig. 5

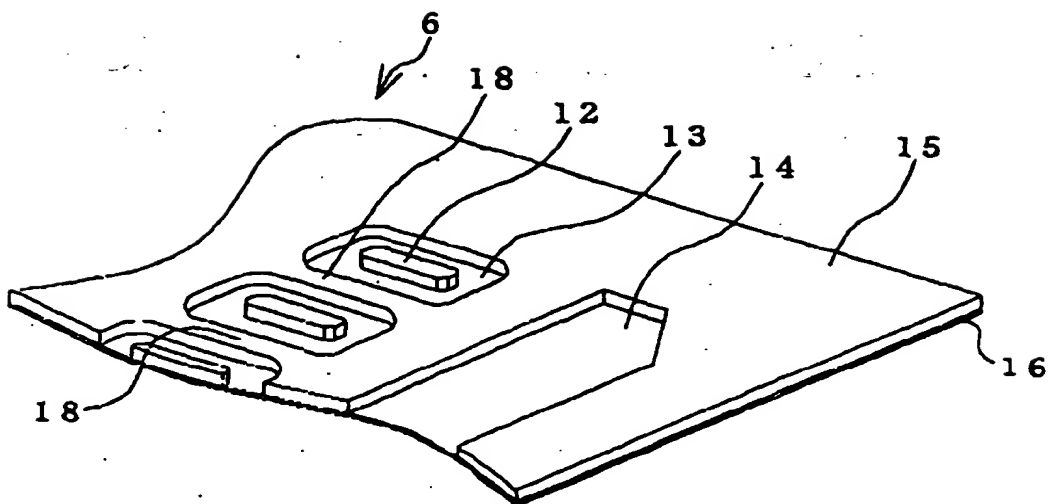


Fig. 6

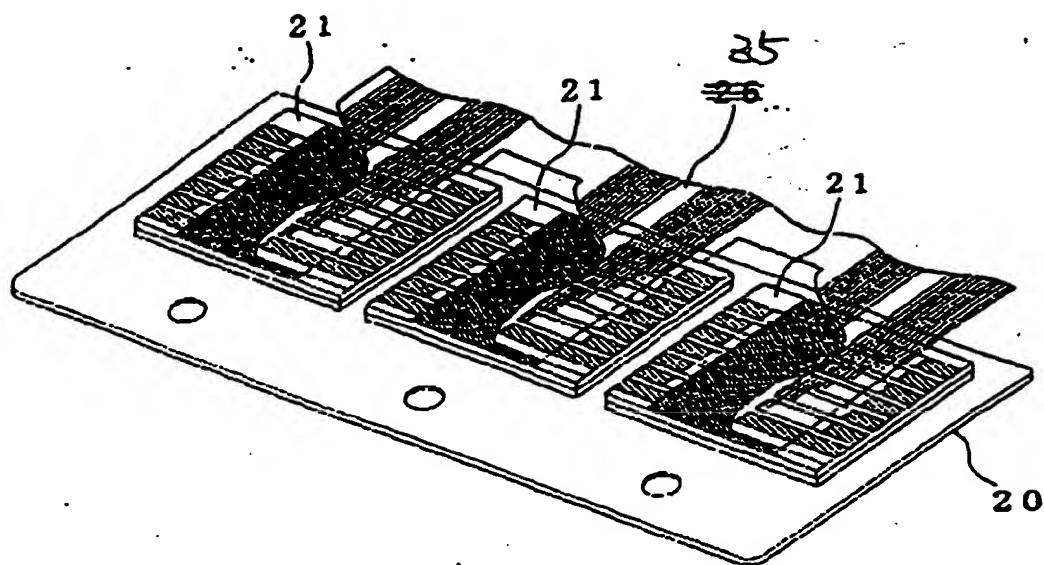


Fig. 7

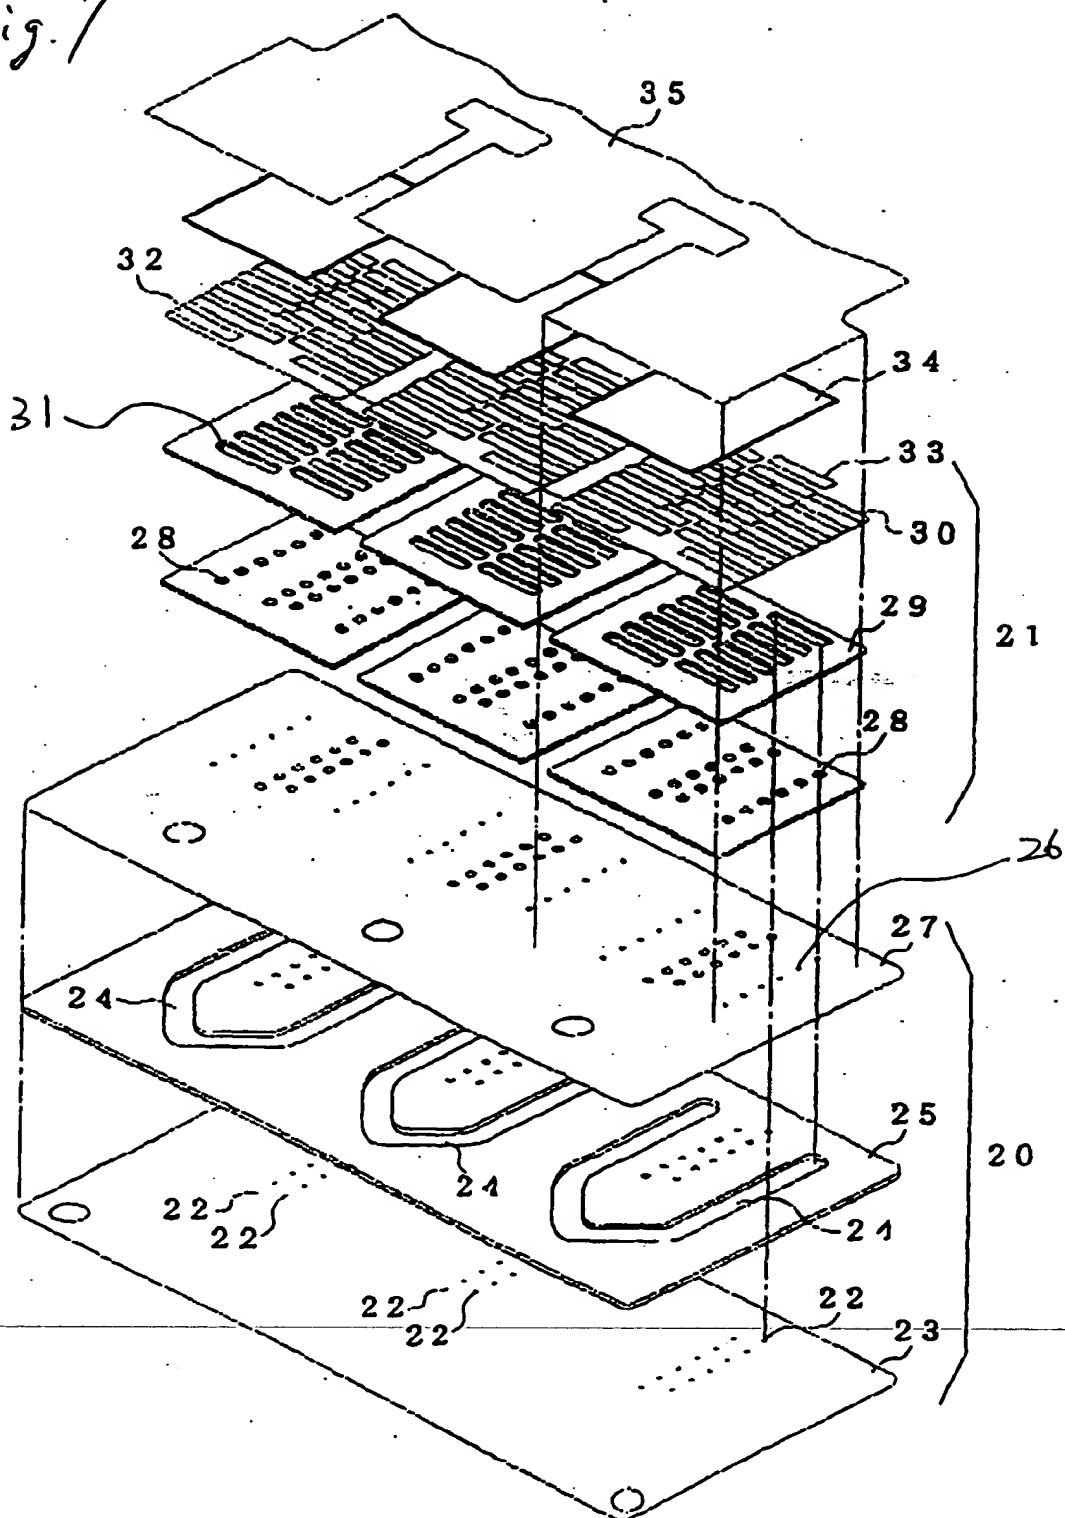


Fig. 8

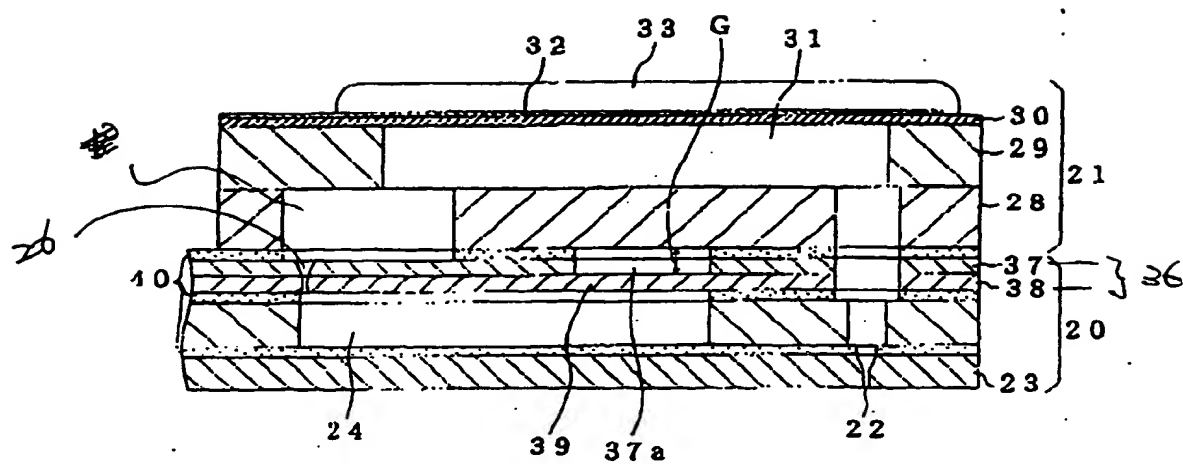


Fig. 9(a)



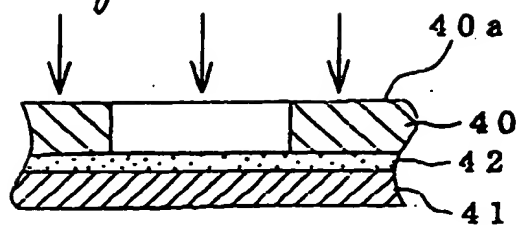


Fig. 9(b)



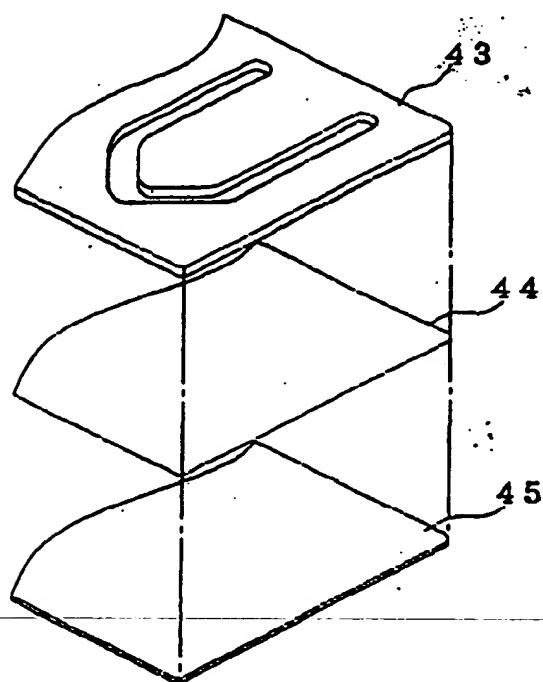

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 024 001 A3**

(12)

EUROPEAN PATENT APPLICATION

(38) Date of publication A3:
13.12.2000 Bulletin 2000/50

(51) Int. Cl.⁷: B41J 2/14, B41J 2/16

(43) Date of publication A2:
02.08.2000 Bulletin 2000/31

(21) Application number: 00101419.0

(22) Date of filing: 25.01.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 29.01.1999 JP 2145099
19.11.1999 JP 32924199

(71) Applicant:
SEIKO EPSON CORPORATION
Shinjuku-ku, Tokyo (JP)

(72) Inventors:
• Takahashi, Tomoaki,
c/o Seiko Epson Corp.
Suwa-shi, Nagano (JP)
• Watanabe, Minoru,
c/o Seiko Epson Corp.
Suwa-shi, Nagano (JP)
• Furuhashi, Atsushi,
c/o Seiko Epson Corp.
Suwa-shi, Nagano (JP)


(74) Representative:
Buzzi, Franco et al
c/o Buzzi, Notaro & Antonielli d'Oulx Srl,
Corso Flume, 6
10133 Torino (IT)

(54) **Ink jet recording head and method of producing a plate member for an ink jet recording head**

(57) A plate member (6) constituting a channel unit (1) of an ink jet recording head has a metal plate (15) which is produced by rolling an etchable material, and a polymer film (16) which is laminated onto one face of the metal plate (15). The long side is perpendicular to

the rolling direction of the metal plate (15). Warpage which easily occurs in the longitudinal direction is suppressed by the rigidity which is large in a direction perpendicular to the rolling direction.

FIG. 5

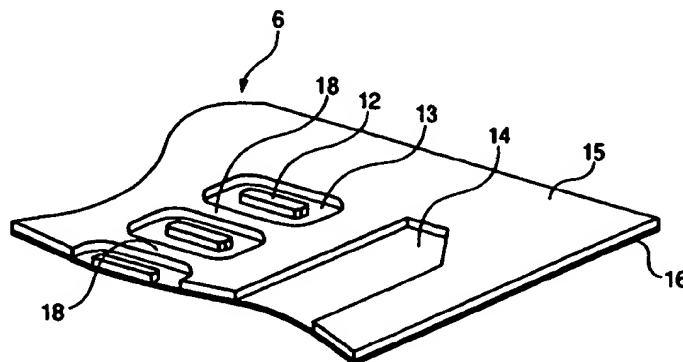

EP 1 024 001 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 10 1419

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 12, 31 October 1998 (1998-10-31) & JP 10 193612 A (SEIKO EPSON CORP), 28 July 1998 (1998-07-28) * abstract *	1,5,13, 19-23	B41J2/14 B41J2/16
A	US 5 008 689 A (CHILDERS WINTHROP D ET AL) 16 Apr 11 1991 (1991-04-16) * column 4, line 25 - line 30 *	1,5,13, 19-23	
A	US 4 574 445 A (BENTIN HORST ET AL) 11 March 1986 (1986-03-11) * column 2, line 3 - line 9 *	1,5,13, 19-23	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B41J
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		23 October 2000	Bardet, M
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (pouCo1)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 10 1419

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 10193612 A	28-07-1998	NONE	
US 5008689 A	16-04-1991	US 4926197 A	15-05-1990
		DE 69109896 D	29-06-1995
		DE 69109896 T	22-02-1996
		EP 0445688 A	11-09-1991
		HK 158696 A	30-08-1996
		JP 4219246 A	10-08-1992
		CA 1319562 A	29-06-1993
		DE 3878446 A	25-03-1993
		DE 3878446 T	09-09-1993
		EP 0332764 A	20-09-1989
		JP 2006139 A	10-01-1990
		JP 2698651 B	19-01-1998
		SG 53593 G	09-07-1993
US 4574445 A	11-03-1986	DE 3326580 A	31-01-1985
		DE 3461259 D	02-01-1987
		EP 0132878 A	13-02-1985
		JP 60042054 A	06-03-1985

